


# Operating and installation instructions

## Rangehood

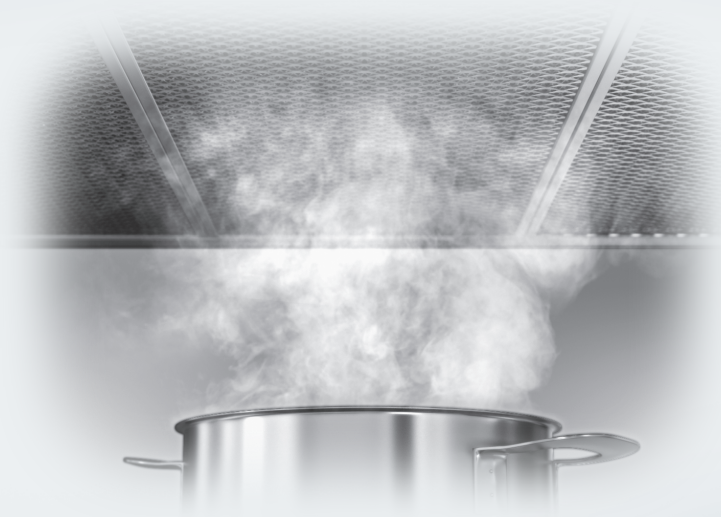

To prevent the risk of accidents or damage to the appliance, it is **essential** to read these instructions before it is installed and used for the first time.

# Contents

---

<b>Warning and Safety instructions</b> .....	4
<b>Caring for the environment</b> .....	13
<b>Description of the functions</b> .....	14
Con@ctivity function.....	15
<b>Guide to the appliance</b> .....	16
<b>Operation (automatic mode)</b> .....	18
Cooking with Con@ctivity 2.0 (automatic mode).....	18
Leaving automatic mode temporarily.....	20
Returning to automatic mode.....	20
<b>Operation (manual mode)</b> .....	21
Cooking without Con@ctivity 2.0 (manual operation).....	21
Switching the fan on.....	21
Selecting a power level.....	21
Selecting the run-on time.....	21
Switching the fan off.....	21
Switching the cooktop lighting on/off.....	22
Power management.....	22
<b>Operation (automatic and manual modes)</b> .....	23
Glass edge feature lighting.....	23
Switching on the glass edge feature lighting.....	23
Changing the colour of the glass edge feature lighting.....	23
Saving a colour.....	23
Switching off the glass edge feature lighting.....	23
Operating hours counter.....	24
Altering the operating hours counter for the grease filters.....	24
Activating and altering the operating hours counter for the NoSmell active charcoal filter.....	25
Reading the filter operating hours counter.....	25
<b>Cleaning and care</b> .....	26
Housing.....	26
Important for the glass edging.....	27
Grease filters.....	27
NoSmell active charcoal filter.....	29
Resetting the operating hours counter for the charcoal filter.....	30
Disposing of the charcoal filter.....	30
<b>Installation</b> .....	31
Before installation.....	31

Protective foil.....	31
Installation instructions.....	31
Dismantling.....	31
Assembly parts.....	32
Appliance dimensions.....	34
Safety distance (S).....	35
Installation recommendations.....	36
Drilling diagram for wall mounting.....	36
<b>Connection for air extraction.....</b>	<b>37</b>
Condensate trap.....	38
Silencer.....	38
<b>Electrical connection.....</b>	<b>40</b>
<b>Activating Con@ctivity 2.0.....</b>	<b>41</b>
Activating Con@ctivity 2.0.....	41
Activating the rangehood.....	41
Activating the cooktop.....	41
Activation check.....	41
<b>After sales service and warranty.....</b>	<b>43</b>
Position of the data plate.....	43
<b>Technical data.....</b>	<b>44</b>
Conformity declaration.....	45

## Warning and Safety instructions

---

This appliance complies with all relevant local and national safety requirements. Inappropriate use can, however, lead to personal injury and damage to property.

To avoid the risk of accidents and damage to the appliance, please read these instructions carefully before using it for the first time. They contain important notes on the safety, installation, use and maintenance of the appliance. Miele cannot be held liable for non-compliance with these instructions.

Keep these instructions in a safe place and ensure that all users are familiar with the contents. Pass them on to any future owner of the appliance.

### Correct application

- ▶ This rangehood is designed for domestic use and for use in similar environments by guests in hotel or motel rooms, bed & breakfasts and other typical living quarters. This does not include common/shared facilities or commercial facilities within hotels, motels or bed & breakfasts.
- ▶ The appliance is not suitable for outdoor use.
- ▶ It must only be used to extract vapours and remove odours from cooking.  
Any other usage is at the owner's risk. Miele cannot be held liable for damage resulting from incorrect or improper use or operation.
- ▶ This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning its use by a person responsible for their safety, and are able to recognise the dangers of misuse.

### **Safety with children**

- ▶ Young children must not be allowed to use this appliance.
- ▶ Older children may only use the appliance when its operation has been clearly explained to them and they are able to use it safely, recognising the dangers of misuse.
- ▶ Cleaning work may only be carried out by older children under the supervision of an adult.
- ▶ Children should be supervised near the appliance. Ensure that they do not play with the appliance.
- ▶ Danger of suffocation! Children may be able to wrap themselves in packing material or pull it over their heads with the risk of suffocation. Keep children away from any packing material.

## Warning and Safety instructions

---

### Technical safety

- ▶ Repairs and other work by unqualified persons could be dangerous. Installation, maintenance work and repairs to electrical appliances must only be carried out by a Miele approved service technician.
- ▶ A damaged appliance can be dangerous. Check it for visible signs of damage. Do not use a damaged appliance.
- ▶ The electrical safety of this appliance can only be guaranteed when continuity is complete between it and an effective earthing system. It is most important that this basic safety requirement is present and tested regularly and, where there is any doubt, the household wiring system should be inspected by a qualified electrician.
- ▶ Before connecting the appliance to the mains supply, ensure that the connection data on the data plate (voltage and frequency) matches the mains electricity supply. This data must correspond in order to avoid the risk of damage to the appliance. Consult a qualified electrician if in any doubt.
- ▶ Do not connect the appliance to the mains electricity supply by a multi-socket unit or an extension lead. Extension leads are a fire hazard and do not guarantee the required safety of the appliance.
- ▶ For appliances with an external motor fitted (...EXT models) the connection of the two units must be made using the connection cable and the plug connectors.  
These models may only be combined with a Miele external motor.


## Warning and Safety instructions

---

- ▶ For safety reasons, this appliance may only be used after it has been built in.
- ▶ This rangehood must not be installed and operated in mobile installations (e.g. on a ship).
- ▶ Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults.  
Only open the housing as described in the instructions given in the installation sheet and in the Cleaning and care section of this booklet. Under no circumstances should any other parts of the housing be opened.
- ▶ Faulty components must only be replaced by genuine Miele spare parts. The manufacturer can only guarantee the safety of the appliance when Miele replacement parts are used.
- ▶ If the electrical connection cable is faulty, it must only be replaced by a Miele authorised service technician to protect the user from danger.
- ▶ During installation, maintenance and repair work, the appliance must be disconnected from the mains electricity supply. It is only completely isolated from the electricity supply when:
  - the mains fuse has been disconnected, or
  - the screw-out fuse is removed (in countries where this is applicable), or
  - it is switched off at the wall socket and the plug is withdrawn from the socket. Do not pull the mains connection cable but the mains plug to disconnect your appliance from the mains electricity supply.

## Warning and Safety instructions

Using at the same time as other heating appliances that depend on the air from the room

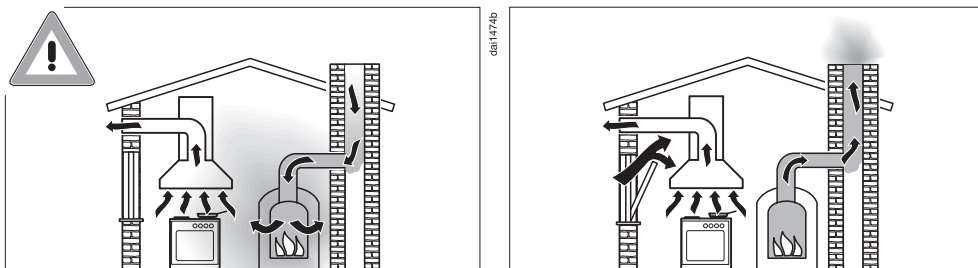

### Warning - danger of toxic fumes

Great care should be taken when using the rangehood at the same time and in the same room or area of the house as another heating appliance which depends on the air in the room. Such appliances include gas, oil, wood or coal-fired boilers and heaters, continuous flow or other water heaters, gas cooktops, or ovens which draw air in from the room and duct exhaust gases out through a chimney or extraction ducting.

When used in extraction mode, with or without an external motor fitted, or in recirculation mode with a recirculation box installed outside the room, the appliance draws air in from the room in which it is installed and from neighbouring rooms.

If there is insufficient air, an underpressure will occur. The heating appliance will be starved of oxygen, impairing combustion. Harmful gases could be drawn out of the chimney or extraction ducting back into the room, with potentially fatal consequences.



## Warning and Safety instructions

In order to ensure safe operation, and to prevent gases given off by the heating appliances from being drawn back into the room when the rangehood and the heater are in operation simultaneously, an underpressure in the room of 0.04 mbar (4 pa) is the maximum permissible.

Ventilation can be maintained by air inlets which cannot be blocked, in windows, doors or outside wall vents, or by other technical measures, such as ensuring that the rangehood can only be switched on when the heating appliance is switched off or vice versa. A ventilation brick alone is not generally sufficient to ensure safe ventilation.

The overall ventilation condition of the dwelling must be taken into account. If in any doubt, the advice of a competent builder or, for gas, a qualified gas fitter must be sought.

The rangehood must not be used in recirculation mode, where the air is directed back into the room where it is located, at the same time as a heating appliance which depends on the room air.

## Warning and Safety instructions

---

### Correct use

- ▶ Never use an open flame beneath the rangehood. To avoid the danger of fire, do not flambé or grill over an open flame. When switched on, the rangehood could draw flames into the filter. Fat deposits could ignite, presenting a fire hazard.
- ▶ The rangehood can become damaged when exposed to excessive heat.
  - When using the rangehood over a gas cooktop, ensure that any burners in use are always covered by a pan. Switch the cooking zone off when a pan is removed, even for a short time.
  - Select a pan which is suitable for the size of the burner.
  - Regulate the flame so that it does not burn up the sides of the pan.
  - Avoid overheating the pan (e.g. when cooking with a wok).
- ▶ Always switch the rangehood on when a cooking zone is in use, otherwise condensation may collect in the rangehood, which could cause corrosion.
- ▶ When cooking with oil or fat, chip pans and deep fat fryers etc., do not leave the pans unattended. Never leave an open grill unattended when grilling. Overheated oil and fat can ignite and could set the rangehood on fire.

## Warning and Safety instructions

---

- ▶ Do not use the rangehood without the filters in place. This way you will avoid the risk of grease and dirt getting into the appliance and hindering its smooth operation.
- ▶ The filters should be regularly cleaned or changed as appropriate. Saturated filters are a fire hazard.
- ▶ The rangehood can get very hot during cooking due to heat rising from the cooktop.  
Do not touch the housing or the grease filters until the rangehood has cooled down.

### Correct installation

- ▶ Refer to the cooktop manufacturer's instructions as to whether a rangehood may be operated above the cooktop.
- ▶ Safety regulations prohibit the fitting of a rangehood over solid fuel stoves.
- ▶ Insufficient distance between the cooktop and the rangehood can result in damage to the rangehood.  
The minimum safety distances between the top of the cooktop and the bottom of the rangehood given in the "Installation" section must be maintained, unless the cooktop manufacturer states that a greater distance is required.  
If more than one cooking appliance is fitted beneath the rangehood, and they have different minimum safety distances to the rangehood, select the greater distance.
- ▶ The distances given in "Installation" must be observed when fitting the rangehood.

## Warning and Safety instructions

---

- ▶ All ducting, pipework and fittings must be of non-flammable material. These can be obtained from Miele or from builders' merchants.
- ▶ The appliance must not be connected to a chimney or vent flue which is in use. Neither should it be connected to ducting which ventilates rooms with fireplaces.
- ▶ If exhaust air is to be extracted into a chimney or ventilation duct no longer used for other purposes, seek professional advice.

### Cleaning and care

- ▶ Do not use a steam cleaning appliance to clean this appliance. The steam could reach electrical components and cause a short circuit.

### Accessories

- ▶ Use only genuine original Miele spare parts. If spare parts or accessories from other manufacturers are used, the warranty will be invalidated, and Miele cannot accept liability.


### Disposal of the packing material

The transport and protective packing has been selected from materials which are environmentally friendly for disposal, and can normally be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites. Ensure that any plastic wrappings, bags etc. are disposed of safely and kept out of the reach of babies and young children. Danger of suffocation.

### Disposing of your old appliance

Electrical and electronic appliances often contain materials which, if handled or disposed of incorrectly, could be potentially hazardous to human health and to the environment. They are, however, essential for the correct functioning of your appliance. Therefore, please do not dispose of your old appliance with your household waste.




Please dispose of it at your local community waste collection / recycling centre.

Ensure that your old appliance presents no danger to children while being stored for disposal.

# Description of the functions

Depending on the model of the rangehood, the following options are available:

## Air extraction mode



dal0494a

The air is drawn in and cleaned by the grease filters and directed outside.

## Non-return flap

The non-return flap is designed to prevent the exchange of room and outside air taking place.

The flap is closed when the rangehood is switched off.

When the rangehood is switched on, the non-return flap opens for the cooking vapours to be blown directly outside.

If the on-site ventilation system does not have a non-return flap, the non-return flap supplied must be fitted.

## Recirculation mode

(available as an optional extra with a conversion kit and charcoal filter: see "Technical Data")




dal0494b

The air is drawn in and cleaned first by the grease filters and then by a charcoal filter. The cleaned air is then recirculated back into the kitchen.

## Operation with an external motor

(...EXT model rangehoods)




dal0494c

Rangehoods set up for operation with an external motor have to be connected to a Miele external motor located in a suitable position outside the room in which the rangehood is installed. The external motor is linked to the rangehood via a connection cable and then operated via Con@ctivity 2.0 or using the controls on the rangehood.

## Con@ctivity function

### Automatic control

The rangehood has a communication facility which enables the automatic operation of the rangehood depending on the operational state of a Miele electric cooktop.

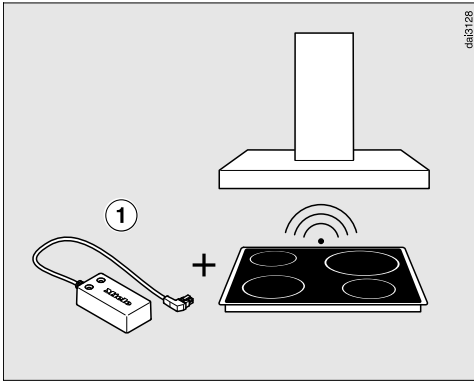

For communication to take place, the cooktop must be fitted with an appropriate Con@ctivity 2.0 stick.

Please consult the installation instructions for the Con@ctivity 2.0 stick to see if connection with your cooktop is possible.


In order to be able to use the Con@ctivity 2.0 function, radio contact between the cooktop and the rangehood must be established (see "Activating Con@ctivity 2.0").

The cooktop transmits information about its operational status via a radio signal to the rangehood.

- When the cooktop is switched on, the cooktop lighting on the rangehood comes on independently and, then after a short time, the fan also comes on.
- During cooking the rangehood automatically sets the power level according to the number of cooking zones in operation and their power levels.
- After switching the cooktop off, the fan and the cooktop lighting will switch off automatically after a specified period of time.

See "Operation" for detailed information about this function.

# Guide to the appliance

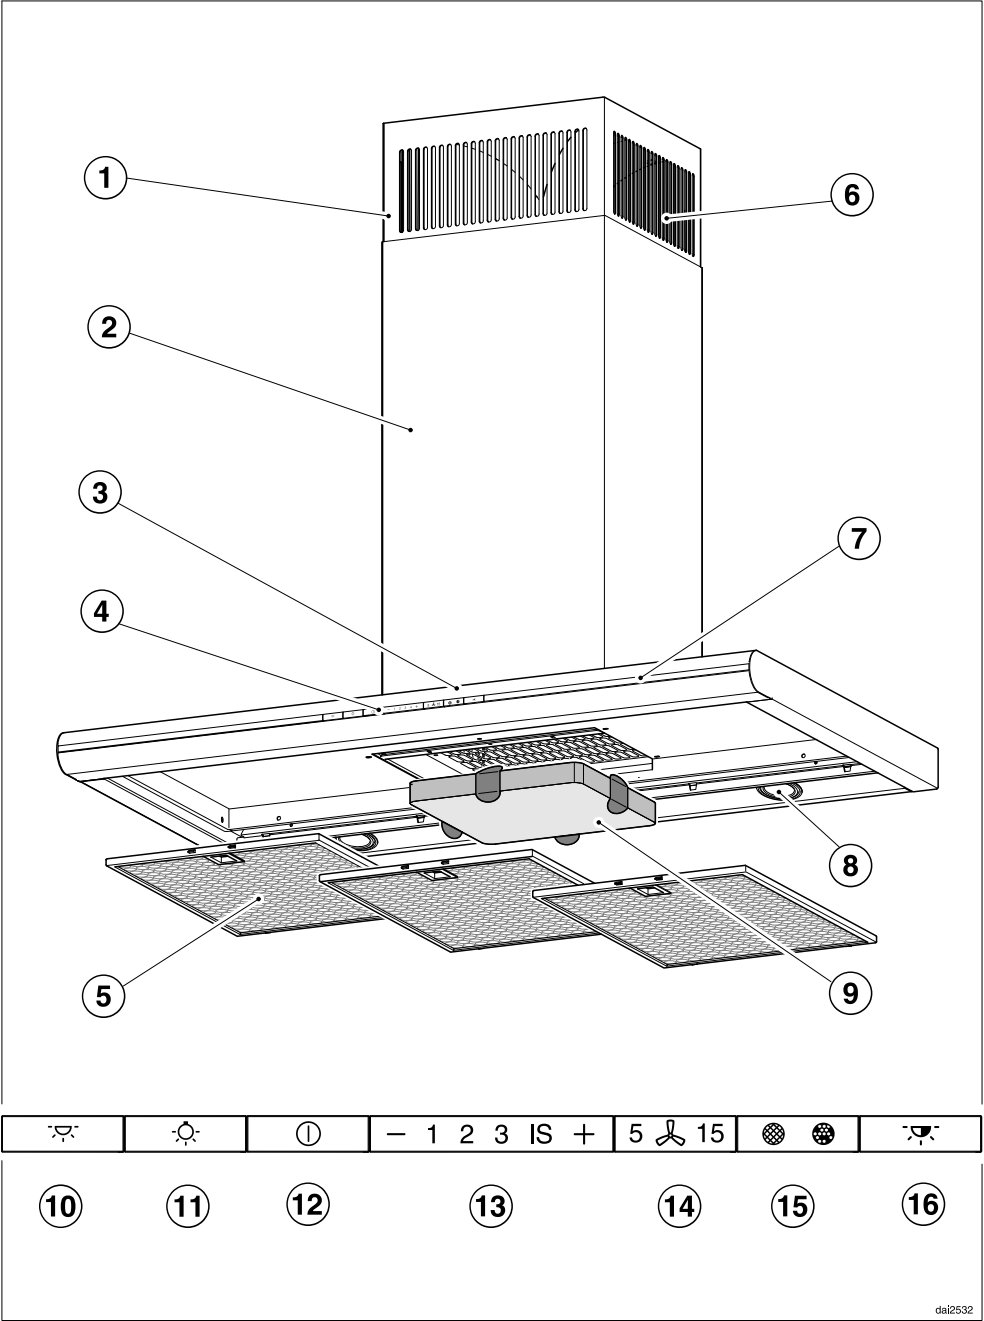



- ① Telescopic extension piece
- ② Tower
- ③ Canopy
- ④ Controls
- ⑤ Grease filters
- ⑥ Recirculation grilles  
(only for recirculation mode)
- ⑦ Glass edge feature lighting
- ⑧ Cooktop lighting
- ⑨ NoSmell active charcoal filter  
(special accessory for recirculation mode)
- ⑩ On/Off touch control for the glass edge feature lighting
- ⑪ Touch control for the cooktop lighting
- ⑫ On/Off touch control for the fan
- ⑬ Touch controls to select the fan power setting
- ⑭ Touch control for the run-on option
- ⑮ Operating hours control
- ⑯ Colour change touch control

## Operation (automatic mode)

If Con@ctivity 2.0 is activated, the rangehood always operates in automatic mode (see "Activating Con@ctivity 2.0").

To operate the rangehood manually, see "Cooking without Con@ctivity 2.0".

### Cooking with Con@ctivity 2.0 (automatic mode)

- Switch a cooking zone on at the power setting you want.


The rangehood lighting will come on.

After a few seconds the fan will come on, first at power setting **2**, then it will switch immediately to power setting **1**.

The rangehood selects the power setting automatically during cooking.

This is determined by the total output of the cooktop, i.e. the number of cooking zones in operation and the power settings selected.

- If you select a higher power setting or are using several cooking zones, the rangehood will switch to a higher power setting.
- When you reduce the power setting or the number of cooking zones on the cooktop, the rangehood power setting will also be reduced.

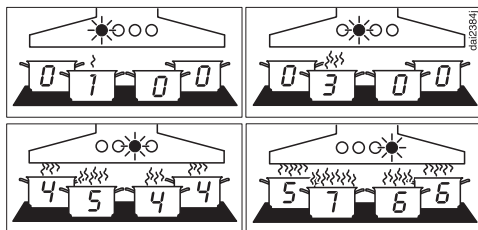

Examples for power levels **1** to **4**

### Reaction time

The rangehood reacts with a slight delay because altering the power setting on the cooktop does not immediately result in a reduction or increase in cooking vapours.

Because the cooktop transmits the information to the rangehood at intervals, this can also cause delays.

The reaction can vary from a few seconds to a couple of minutes.

### Cooking process

- If, for example, you switch on a cooking zone at the highest power setting to heat a pan for frying and reduce the power level after approx. 60 to 90 seconds\*, a cooking process is recognised (\*60 seconds to 5 minutes for a HiLight cooktop).

The rangehood switches itself on and when the cooktop power level has been reduced, the rangehood switches to power setting 3 and remains at that level for approx. 5 minutes.

After that the rangehood power setting is determined automatically by the Con@ctivity function.

- You can select another power setting manually before then.

### Switching off

- Switch off all cooking zones.

The rangehood fan will reduce its power level over the next few minutes and will eventually switch itself off.

This helps to neutralise any lingering vapours and odours in the air.

- From the intensive setting IS the fan switches immediately to setting 3.
- From setting 3 the fan switches to setting 2 after approx. one minute.
- From setting 2 the fan switches to setting 1 after two minutes.
- After 2 minutes at setting 1, the fan switches itself off.
- After another 30 seconds, the lighting switches off.


The cooking process is then finished.

## Operation (automatic mode)

---

### Leaving automatic mode temporarily

To leave automatic mode temporarily during cooking:

- Manually select a different power setting, or
- Manually switch the rangehood off, or
- Activate the run-on option  on the rangehood. The fan will switch off after the selected time and the lighting remains switched on.

The rangehood functions can now be operated manually (see "Cooking without Con@ctivity 2.0").

### Returning to automatic mode

The rangehood returns to automatic mode:

- if the rangehood has not been used for approx. 5 minutes after selecting a power setting manually, or
- if the manually selected power setting corresponds to the automatic one again, or
- if the rangehood fan and the cooktop have been switched off for at least 30 seconds.  
Automatic mode will resume next time the cooktop is switched on.
- If you wish to operate the rangehood manually for a complete cooking process, switch on the rangehood fan **before** switching on the cooktop. If the rangehood and the cooktop have been switched off for at least 30 seconds after cooking, automatic mode will resume the next time the cooktop is switched on.

### Cooking without Con@ctivity 2.0 (manual operation)

The rangehood can be operated manually if:

- The Con@ctivity 2.0 function is not activated.
- You have temporarily switched off the Con@ctivity 2.0 function (see "Leaving automatic mode temporarily").

### Switching the fan on

- Press the On/Off touch control ①.

The fan will switch on at setting **2**. The ① symbol and **2** will light up in the power setting display.

### Selecting a power level

For light to heavy cooking vapours and odours, select from power settings **1** to **3**.

When frying or cooking food with a strong aroma, select the Intensive setting **IS**

- For a lower power setting, press the "-" control, or "+" for a higher level.




### Reducing power on the Intensive setting

If power management is activated (preset), the fan will switch to setting **3** after 5 minutes.

### Selecting the run-on time

It is advisable to run the fan for a few minutes after cooking has finished to neutralise any lingering vapours and odours in the air.

With the run-on function the fan switches itself off automatically after a pre-selected time.

- After you have finished cooking, press the run-on function touch control **5**  **15**
- Once: the fan will switch itself off after 5 minutes (**5** lights up).
- Twice: The fan will switch itself off after 15 minutes (**15** lights up).
- If you press the run-on control **5**  **15** again, the fan remains on (**5**  **15** goes out).

### Switching the fan off

- Press the On/Off touch control ① to switch the fan off.

The ① symbol will go out.


## Operation (manual mode)

---

### Switching the cooktop lighting on/off

The cooktop lighting can be switched on and off independently of the fan.

- To do this, press .




The  symbol will light up when the cooktop lighting is switched on.

### Power management

The rangehood features a power management system for switching off the lighting and reducing the fan power setting automatically.

- If the Intensive setting is selected, the fan will automatically switch to setting 3 after 5 minutes.
- From settings 3, 2 or 1 the power will be reduced by one setting after 2 hours and then in 30 minutes stages until the fan finally switches off.
- The cooktop lighting will switch off automatically after 12 hours.

### Switching power management on/off

- Switch off the fan and the lighting.
- Press the run-on control **5**  **15** for approx. 10 seconds, until the **1** lights up.
- Then press in turn,
  - the lighting control ,
  - then the "-" touch control, and
  - the lighting control  again.

If power management is switched on, the **1** and **IS** indicators will light up constantly.

If it is switched off, **1** and **IS** will flash.

- Press "-" to switch power management off.

The **1** and **IS** indicators will flash.

- To switch it on, press "+".

The **1** and **IS** indicators will light up constantly.

- Confirm the selection by pressing the run-on control **5**  **15**.

All the indicator lights will go out.


If you don't confirm your selection within 4 minutes, the rangehood will automatically revert to the previous setting.

# Operation (automatic and manual modes)

## Glass edge feature lighting

### Switching on the glass edge feature lighting



The glass edge feature lighting can be switched on and off independently of the fan and cooktop lighting.

- Press the control for the glass edge feature lighting  to switch it on.

### Changing the colour of the glass edge feature lighting

You can change the colour of the glass edge lighting to any colour you like.

The colour is preset to white.

- Switch on the glass edge feature lighting .
- By repeatedly pressing the colour change control , you can scroll through the six preset standard colour settings as follows:

1. White
2. Green
3. Red
4. Blue
5. Rapid colour change


The colour of the lighting changes continuously. The colours rotate once every minute. Initially the colour change symbol flashes rapidly.

6. Slow colour change

As with 5, but the colours rotate once every 15 minutes. Initially the colour change symbol flashes slowly

### Saving a colour


You have the option of saving one favourite colour to memory.

- Select rapid or slow colour change (colour setting 5 or 6).
- When the desired colour is reached, press and hold the colour change control  until the glass edge lighting flashes three times.

This lighting colour is now saved in an additional colour setting 7.

It can be selected at any time until you decide to save a different colour in the same way.

### Switching off the glass edge feature lighting

- Press the control for the glass edge feature lighting .



The lighting will switch off after a short delay.

When the glass edge lighting is next switched on, the most recently selected colour setting 1 to 7 will come on again.

# Operation (automatic and manual modes)

## Operating hours counter




The number of hours the appliance has been in operation is stored in memory.


When the grease filter symbol  or the charcoal filter symbol , lights up, the operating hours counters are signalling that the filters need to be cleaned or changed. Further information about cleaning and changing the filters and resetting the operating hours counter can be found under "Cleaning and care".

## Altering the operating hours counter for the grease filters

You can set the operating hours counter for the grease filters to suit the type of cooking you do.


It is set at the factory for 30 hours.

- Select a shorter time (20 hours) if you fry a lot.
- If you only cook occasionally, we recommend that you still select a short time because grease which has built up gradually over a long period of time will harden on the filters and make cleaning more difficult.
- If you use very little fat for cooking, select a longer time (40-50 hours).
- Press the On/Off touch control  to switch the fan off.
- Press the run-on control  **15** and the operating hours counter  at the same time.

The grease filter symbol  and one of the fan power setting indicators flash.

Fan power setting indicators **1** to **IS** show the time set:

<b>1</b> .....	20 hours
<b>2</b> .....	30 hours
<b>3</b> .....	40 hours
<b>IS</b> .....	50 hours

- Press the "-" symbol for a shorter operating time, or the "+" symbol to select a longer operating time.
- Confirm the selection by pressing the operating hours control .

All the indicator lights will go out.

If you don't confirm your selection within 4 minutes, the rangehood will automatically revert to the previous setting.





# Operation (automatic and manual modes)

## Activating and altering the operating hours counter for the NoSmell active charcoal filter

The charcoal filter is needed for recirculation mode.


The operating hours counter for the charcoal filter needs to be activated once and the operating hours counter needs to be set to suit the kind of cooking you do:

- Press the On/Off touch control ① to switch the fan off.
- Press the "+" symbol and the operating hours control  at the same time.

The charcoal filter symbol  and one of the fan power settings will flash.

Fan power setting indicators **1 to IS** show the time set:

<b>1</b> .....	120 hours
<b>2</b> .....	180 hours
<b>3</b> .....	240 hours
<b>IS</b> .....	Deactivated




- Press the "-" symbol for a shorter operating time, or the "+" symbol to select a longer operating time.
- Confirm the selection by pressing the operating hours control .

All the indicator lights will go out.

If you don't confirm your selection within 4 minutes, the rangehood will automatically revert to the previous setting.

## Reading the filter operating hours counter

To check the percentage of time set already used:

- Press the On/Off touch control ① to switch the fan on.
- Press and hold the operating hours control 
  - Once, to read the grease filter operating hours. The grease filter symbol  lights up.
  - Twice, to read the charcoal filter operating hours. The charcoal filter symbol  lights up.

One or more of the fan power setting indicators will flash.

The number of flashing sensors indicates the percentage of the operating time which has already been used up.

Indicator <b>1</b> .....	25 %
Indicators <b>1</b> and <b>2</b> .....	50 %
Indicators <b>1</b> to <b>3</b> .....	75 %
Indicators <b>1</b> to <b>IS</b> .....	100 %

The number of operating hours used remains in the memory even when the appliance is switched off or there is a power cut.

# Cleaning and care

---

## Housing

### General

The surfaces and controls are susceptible to scratches and abrasion.

Please observe the following cleaning instructions.

- Switch the rangehood off before any cleaning or maintenance work is carried out
- All external surfaces and controls can be cleaned using warm water with a small amount of washing-up liquid applied with a well wrung-out soft sponge or cloth.

Do not use too much water when cleaning the controls.

Water could penetrate into the electronics and cause damage.

- After cleaning, wipe the surfaces dry using a soft cloth.

Do not use:

- cleaning agents containing soda, acids, chlorides or solvents,
- abrasive cleaning agents, e.g. powder cleaners or cream cleaners and abrasive sponges, as well as pot scourers or sponges which have been used previously with abrasive cleaning agents. These will damage the surface material.

### Important for appliances with stainless steel surfaces

(This information does not apply to the controls)

- Stainless steel surfaces can be cleaned with a proprietary non-abrasive cleaning agent designed specifically for use on stainless steel.
- To help prevent re-soiling, a proprietary conditioning agent for stainless steel (Original Miele Care product for stainless steel) can also be used. Follow the manufacturer's instructions on the packaging. Apply sparingly with a soft cloth following the instructions on the packaging.

### Important for appliances with lacquered housing

(Special order finish)

- Observe the general notes on cleaning earlier in this section.

It is very difficult to clean this type of surface without causing minor marks to the surface material. This can become particularly noticeable if there is halogen lighting in the kitchen.

## Controls

Do not leave soiling on the controls for any length of time.

Otherwise they may suffer discolouration or damage.

Remove any soiling immediately.

- Observe the general notes on cleaning earlier in this section.

Do not use stainless steel cleaning agents on the controls.

## Important for the glass edging

- The glass edging can be cleaned using a proprietary non-abrasive cleaning agent designed specifically for use on glass.

## Grease filters


The re-usable metal grease filters in the appliance remove solid particles (grease, dust, etc.) from the kitchen vapours, preventing soiling of the rangehood.



An oversaturated filter is a fire hazard.

## When to clean the grease filters

The grease filters should be cleaned regularly (at least every 3-4 weeks) to avoid a build-up of grease.

Clean them immediately if the grease filter operating hours control  lights up.

- You can set the operating hours counter for the grease filter to suit the type of cooking you do (see "Operation").


## Removing the grease filters

The grease filters can fall out when you are handling it.

This can result in damage to the filters and the cooktop below.

Make sure you hold the filters securely at all times when handling them.

## Cleaning and care

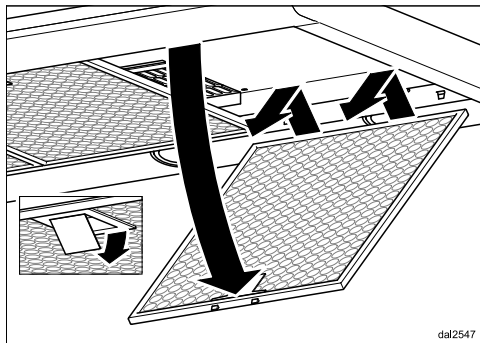

- To take out a grease filter, release the locking clip on the filter, lower the filter approx. 45°, unhook it at the back and remove it.

### Cleaning the grease filters by hand

- Clean the filters with a soft nylon brush in a mild solution of hot water and a small amount of washing-up liquid. Do not use undiluted washing up liquid.

### Unsuitable cleaning agents

Unsuitable cleaning agents can cause damage to the surface of the filters if used regularly.

Do not use:

- cleaning agents containing descaling agents,
- powder cleaners or cream cleaners,
- aggressive all-purpose cleaning agents or spray cleaners for grease,
- oven sprays.

### Cleaning the grease filters in the dishwasher


- Place the filters as upright as possible in the lower basket, with the short sides upright, ensuring the spray arm is not obstructed.
- Use a proprietary household dishwasher detergent.
- Select a dishwasher programme with a wash temperature between 50 °C and 65 °C.

Depending on the cleaning agent used, cleaning the filters in a dishwasher can cause permanent discolouration to the surface. However, this will not affect the functioning of the filters in any way.

### After cleaning

- After cleaning, leave the filters to dry on an absorbent surface before refitting them.
- When removing the filters for cleaning, also clean off any residues of oil or fat from the now accessible housing to prevent the risk of these catching fire.


- Replace the grease filters, making sure that the locking clips are facing down towards the cooktop.

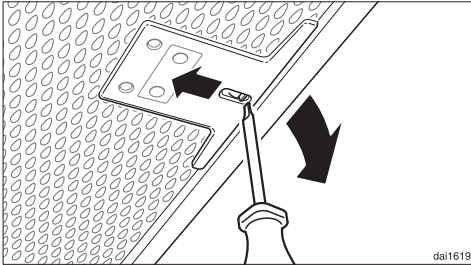

- If a grease filter is inadvertently refitted upside down, insert a small screwdriver blade into the slit to disengage the clip.


## Resetting the operating hours counter for the grease filters

After cleaning, the operating hours counter needs to be reset.

- Whilst the fan is switched on, press the operating hours control  for approx. 3 seconds until only the **1** is flashing.

The grease filter symbol  goes out.

If the grease filters are cleaned before the operating hours counter has reached its maximum,

- Press the operating hours control  for approx. 6 seconds, until only the **1** is flashing.


## NoSmell active charcoal filter

If the rangehood is connected for recirculation, a charcoal filter must be inserted in addition to the grease filters. This is designed to absorb cooking odours and is fitted in the canopy above the grease filters.

Replacement charcoal filters can be obtained from Miele or via the internet at [www.miele-shop.com](http://www.miele-shop.com) (depending on country). See back cover for contact details, and "Technical data" for type and reference number.

## Fitting and replacing a charcoal filter

- Before fitting or replacing the charcoal filter, the grease filters must first be taken out (see previous section for instructions on how to do this).
- Unwrap the charcoal filter from its packaging.

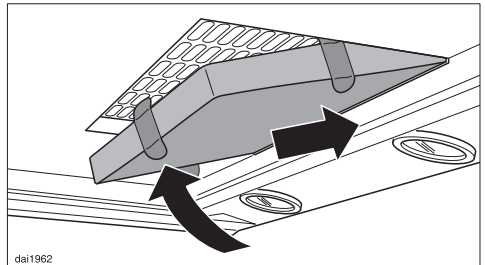


- Insert the charcoal filter into the back of the charcoal filter frame, then push up into the frame at the front.
- Refit the grease filters.
- When fitting for the first time, activate the operating hours timer (see "Operation").

# Cleaning and care

---

## When to change the NoSmell active charcoal filter



- Always replace the charcoal filter when it no longer absorbs kitchen odours effectively. It should, however be replaced at least every 6 months.

The charcoal filter operating hours counter  will light up to remind you to change the charcoal filter regularly.


- The charcoal filter operating hours counter needs to be activated before using for the first time (see "Operation").

## Resetting the operating hours counter for the charcoal filter

After changing the charcoal filters, the operating hours counter needs to be reset.

- To do this, with the fan switched on, press the operating hours control  twice, then press it again and hold it for approx. 3 seconds until only the **1** is flashing. The charcoal filter symbol  will go out.


If you replace the charcoal filter **before** the operating hours counter has reached its maximum:

- Press the operating hours control  twice and hold it for approx. 6 seconds until only the **1** is flashing.

## Disposing of the charcoal filter

- The used charcoal filter can be disposed of with the normal household waste.

## Before installation

 Before installation, it is important to read the information given on the following pages as well as the "Warning and Safety instructions" at the beginning of this booklet.

## Protective foil

The housing components have protective foil around them to prevent them from transport damage.

- Please remove this foil before fitting the housing components. It can be peeled off easily.


## Installation instructions

See enclosed installation sheet for instructions on how to install this appliance.

## Dismantling

Should the appliance ever need to be dismantled, follow the installation instructions in reverse order as described on the installation sheet. A lever is supplied to assist with the removal of the tower.


- After unscrewing the two fixing screws on the tower,

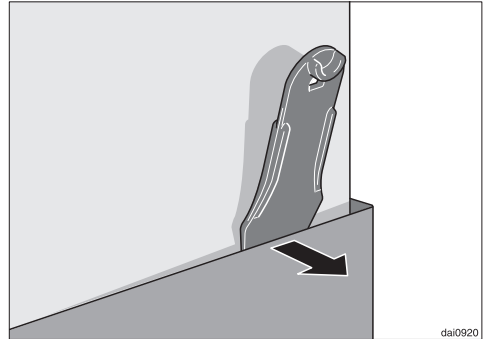

- push the lever between the tower and the extension piece
- to lever the tower out of its fixings.


# Installation

## Assembly parts

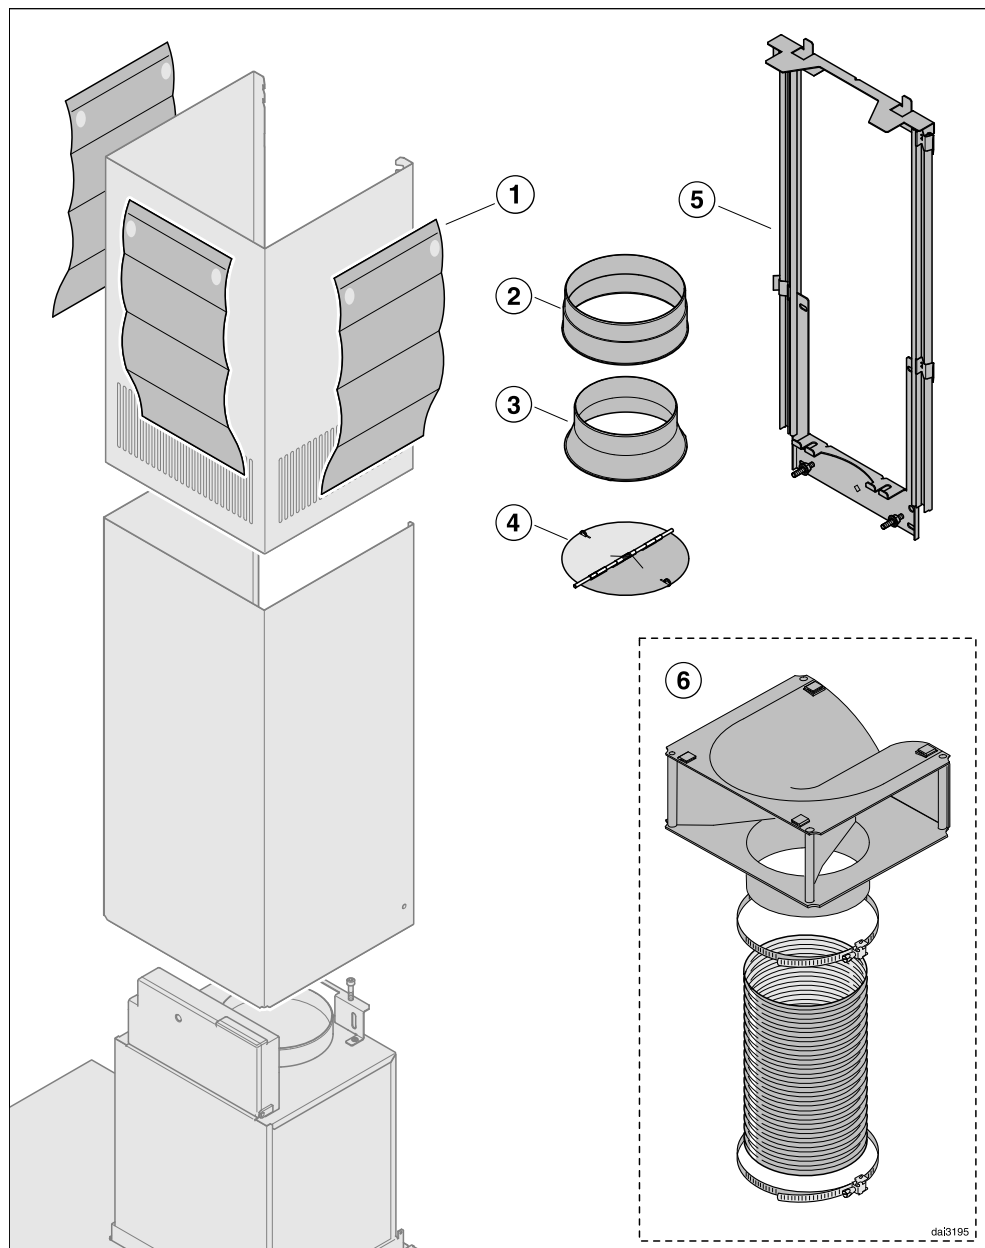



- ① **3 protective sheets**  
for use when fitting the tower.
- ② **1 floating bracket**  
for exhaust ducting Ø 150 mm.
- ③ **1 reducing collar**  
for exhaust ducting Ø 125 mm.
- ④ **1 non-return flap**  
for fitting into the exhaust connection on the motor unit (not needed for recirculation mode).
- ⑤ **Telescopic wall bracket**  
for securing the rangehood to the wall.
- ⑥ **Conversion kit for recirculation mode**  
including directional unit, flexible aluminium hose and hose clips (the conversion kit is not supplied. It is available as an optional extra - see "Technical data").



5619910026820

**6 screws 5 x 60 mm and  
6 plugs 8 x 50 mm**  
for securing the wall bracket.

The screws and plugs are designed for use in solid walls only. For other types of wall construction, alternative fixings will be required. Make sure the wall is able to take the weight of the rangehood.




00031682

**2 x M 6 self-tapping nuts**  
for securing the appliance.




06256130

**2 screws 3.9 x 7.5 mm**  
for securing the tower.



0003716

**1 lever**  
for dismantling the tower.




dfna3mle

## Installation instructions

# Installation

## Appliance dimensions

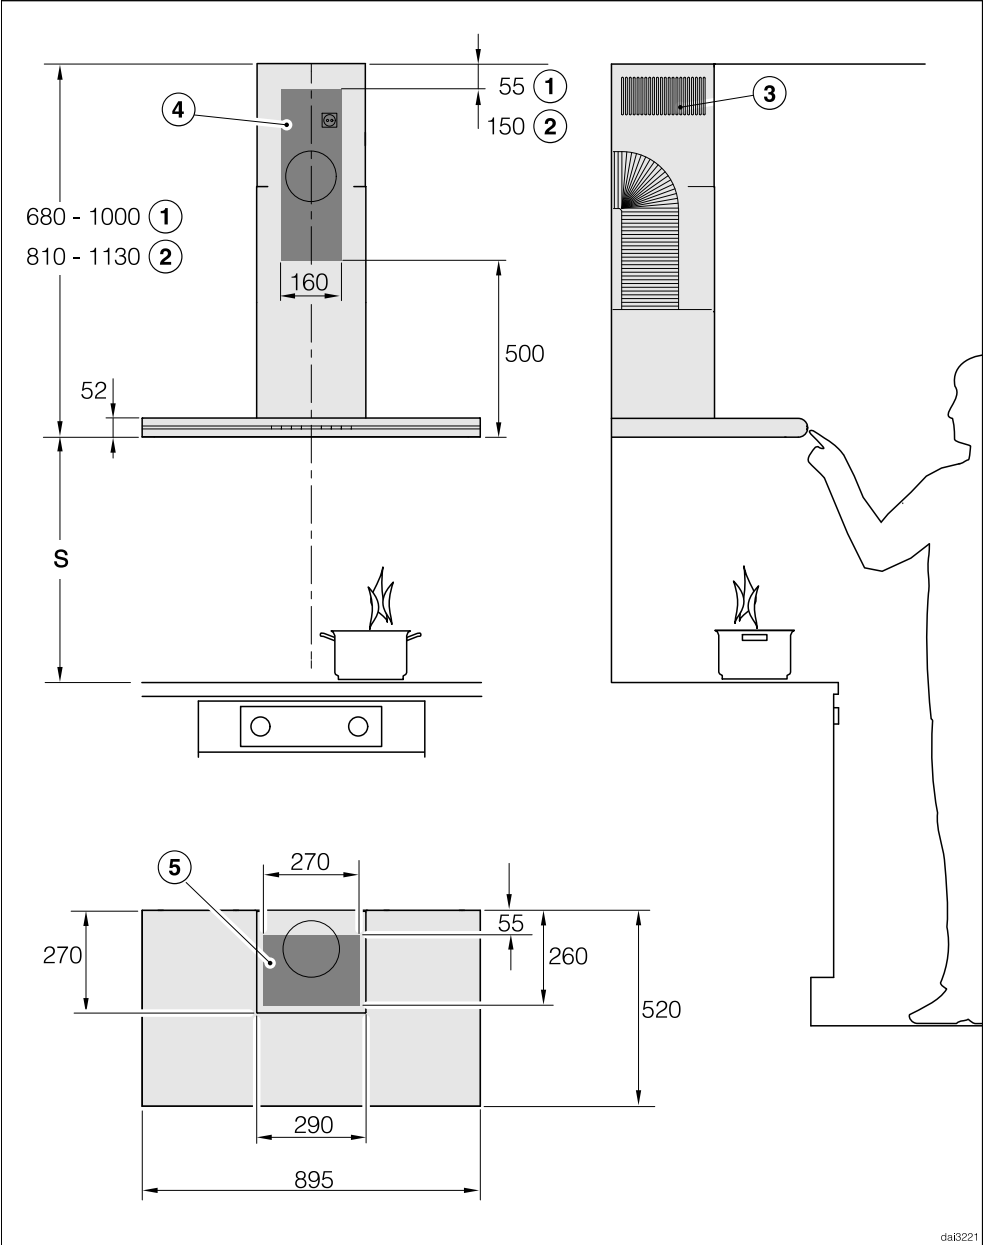

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Ventilation grille positioned at the top for recirculation
- ④⑤ (only ④ is required for recirculation mode rangehoods): The shaded area represents the wall or ceiling area for the vent cut-out, for fitting the connection socket and on EXT models for feeding the connection cable through to the external motor. Recirculation mode rangehoods only require an electrical connection socket.

Connection for air extraction Ø 150 mm, or Ø125 mm with reducing collar.

## Safety distance (S)

The minimum distances between the top of a cooktop (excluding trivets, dials - depending on model) and the bottom of the rangehood are as follows, unless a greater distance is specified by the manufacturer of your cooking appliance. See also "Warning and Safety instructions".

Cooking appliance	Minimum distance S
Electric cooktop	600 mm
Open electric grill	650 mm
Deep fat fryer (electric)	650 mm
Multi-burner gas cooktop with maximum 45.4 MJ/h total output, with no burner having a greater output than 16.2 MJ/h.	650 mm
Multi-burner gas cooktop with total output greater than 45.4 MJ/h, or a gas cooktop including a single burner with an output greater than 16.2 MJ/h.	760 mm
Single gas cooktop with a maximum output of 21.6 MJ/h.	650 mm
Single gas cooktop with a maximum output greater than 21.6 MJ/h.	760 mm


# Installation

## Installation recommendations

- When deciding on the safety distance between the cooktop and rangehood, please note that a distance of 650 mm above electric cooktops may be preferable to give more working space under the rangehood.
- Account should also be taken of the height of the person who will be using the rangehood most often. They should have sufficient space to work comfortably at the cooktop, and be able to reach the rangehood controls with ease.
- If positioned too high, extraction will be inefficient.
- To achieve optimum vapour extraction, the rangehood must cover the cooktop. It should be positioned centrally over the cooktop, not to the side.
- The cooktop should be no wider than the rangehood, and if possible, it should be narrower, especially for distances greater than 750 mm.
- The installation area must be easily accessible. The rangehood should be easily accessible and easy to dismantle in the event that service is required. This should be taken into consideration when planning the position of cupboards, shelves, ceilings or features in the vicinity of the rangehood.

## Drilling diagram for wall mounting

- Please follow the directions given in the installation instructions supplied for drilling.

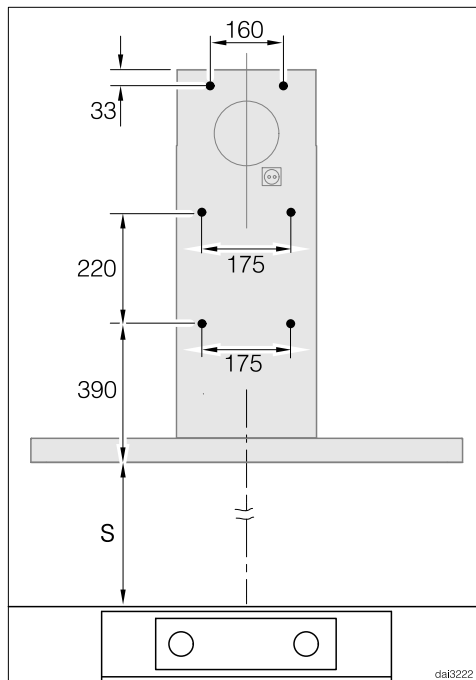

- For pre-installation of a back wall where the holes have to be pre-drilled, please refer to the drilling distances in the drawing above (screws  $\varnothing$  5 mm).

**⚠** Before installation, it is important to read the information given on the following pages as well as the "Appliance dimensions" and the "Warning and Safety instructions" at the beginning of this booklet. This is particularly crucial when using the rangehood at the same time as a heating appliance that relies on oxygen from the same room, which could result in the build-up of toxic fumes.

It is particularly important that the "Warning and Safety instructions" are observed.

The rangehood should be installed according to local and national building regulations. Seek approval from the building inspector where necessary.

- Only use smooth pipes or flexible hoses made from non-flammable materials for the extraction ducting.

Highly flexible, concertina type ducting material will greatly reduce the performance of the rangehood.


- When using an external motor, make sure that the exhaust ducting is sufficiently rigid. The external motor can cause an underpressure which can result in the exhaust ducting distorting.
- To achieve the greatest possible air extraction with the lowest noise level, please note the following:
  - To ensure efficient air extraction, the diameter of the exhaust ducting should not be less than 150 mm.

A reduction in diameter will compromise the extraction performance of the rangehood.

- If flat ducting is being used, the cross-sectional area must not be smaller than the cross-sectional area of the exhaust connection.
- The exhaust ducting should be as short and straight as possible.
- Only use wide radius bends.
- The exhaust ducting should not be kinked or compressed.
- Ensure that all connections are strong and airtight.

Remember that any constriction of the airflow will reduce extraction performance and increase operating noise.

- If the exhaust is ducted through an outside wall, a telescopic wall vent or a roof vent (available as an optional accessory) is recommended.

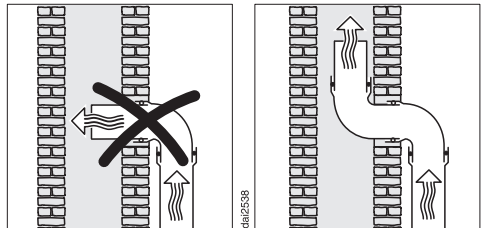


- If the exhaust air is to be ducted into a vent flue, the ducting must be directed in the flow direction of the flue.

## Connection for air extraction

- When ducting is horizontal it must be laid to slope away at at least 1 cm per metre. This is to ensure that condensate cannot drain back into the rangehood.
- If the exhaust ducting is to run through rooms, ceiling space etc. where there may be great variations in temperature between the different areas, the problem of condensation will need to be addressed. The exhaust ducting will need to be suitably insulated.

### Condensate trap

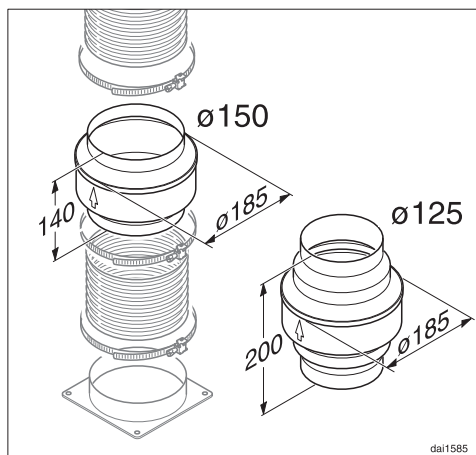

In addition to insulating the exhaust ducting, we recommend that a suitable condensate trap is also installed to collect and evaporate any condensate which may occur.

Condensate traps are available for 125 mm or 150 mm ducting.


- When installing a condensate trap, ensure that it is positioned vertically and if possible directly above the

exhaust connection.

The arrow on the housing indicates the direction of airflow.

The condensate trap will be integrated in rangehoods which are designed to be connected to an external fan (model.....EXT).

### Silencer

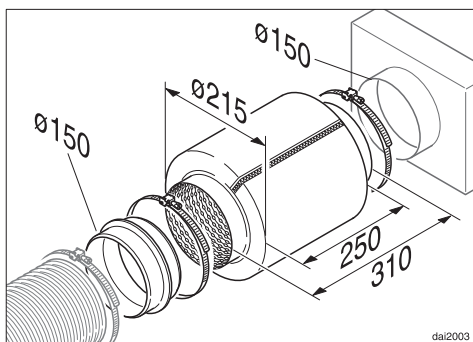

To achieve even further reductions in noise levels, a special silencer (optional accessory) can be fitted in the ducting system.


### Air extraction mode

The silencer not only reduces noise from the motor outside the house, but also sounds from outside (e.g. traffic noise). For this reason, the silencer must be positioned as close as possible to the ducting exit ①.

### Recirculation mode

The silencer needs to be positioned between the exhaust connection and the directional unit ②. Ensure there is adequate space in the tower for fitting it.

### Air extraction with external motor

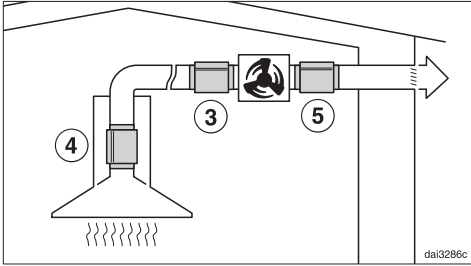

To minimise noise from the motor in the kitchen, the silencer should be positioned in front of the external motor ③ if possible, or, if the ducting is long, above the exhaust connection inside the rangehood ④. In the case of an external motor located inside the house, fitting a silencer behind the external motor ⑤ reduces the noise of the motor outside the house.

## Electrical connection

---

The rangehood must be connected to a suitably earthed socket (AC 230 V, 50 Hz). All electrical work should be undertaken by a suitably qualified and competent person in strict accordance with current national and local safety and building code regulations. Installation, repairs and other work by unqualified persons could be dangerous, for which the manufacturer cannot be held liable.

Ensure power is not supplied to the appliance until after installation or repair work has been carried out.

For extra safety it is advisable to install a residual current device (RCD) with a trip current of 30 mA.

Connection of this appliance should be made via a suitable isolator which complies with national and local safety regulations and the On-Off switch should be easily accessible after the appliance has been built in.

If the mains socket is not accessible after installation, an additional means of disconnection must be provided for all poles. There must be an all-pole contact gap of 3 mm in the switch (including switch, fuses and relays according to EN 60335).

The connection data is given on the data plate. (See "After sales service"). Ensure that this data matches the household mains supply.



### Activating Con@ctivity 2.0



In order to use the Con@ctivity 2.0 function, radio contact between the cooktop and the rangehood must be activated.

Both appliances must be installed and operational.

You only need to carry out the activation procedure once. If the appliances are disconnected from the electricity supply, during a power cut for example, they will still remain activated.

To establish the radio connection, the rangehood and cooktop must be activated at the same time. First activate the rangehood, then the cooktop.

#### Activating the rangehood

- Switch off the fan, cooktop lighting and cooktop.
- Press the run-on option control **5**  **15** for approx. 10 seconds until the indicator for the power setting **1** lights up.
- Then press in turn,
  - the "—" control,
  - then the "+" control,
  - then the lighting control .

If Con@ctivity 2.0 has not been activated, the indicators for settings **2** and **3** will flash at the same time.

- To activate Con@ctivity 2.0, touch the "+" control.


**2** will light up constantly and **3** will flash. The search for a signal starts.

- Meanwhile, start the activation of the cooktop.

#### Activating the cooktop

- While the rangehood is searching for the radio connection, start activating the cooktop. More information about this can be found in the operating instructions for the cooktop.

When the radio connection has been established, **2** and **3** will light up constantly on the rangehood.



- Confirm activation of the rangehood with the run-on option control **5**  **15**. All indicators will go out.
- Confirm the activation on the cooktop.

The Con@ctivity 2.0 function can now be used.

If you do not confirm your selection within 4 minutes, activation will not take place.

#### Activation check

To check whether Con@ctivity 2.0 has been activated for the rangehood:


- Switch off the fan and cooktop lighting.
- Press the run-on option control **5**  **15** for approx. 10 seconds until the indicator for the power setting **1** lights up.
- Then press in turn,
  - the "—" control,
  - then the "+" control,
  - then the lighting control .

## Activating Con@ctivity 2.0

---

If Con@ctivity 2.0 has been activated, the indicators for settings **2** and **3** will be lit up constantly.

If Con@ctivity 2.0 has not been activated, the indicators for settings **2** and **3** will flash at the same time.

- To exit the check, press the run-on option control **5**  **15**. All indicators will go out.
- To check whether Con@ctivity has been activated on the cooktop, see the operating instructions for the cooktop.
- If connection cannot be established despite activating the Con@ctivity function on the rangehood and cooktop, the function must be deactivated on both appliances and then the procedure repeated.

In the event of a fault which you cannot remedy yourself, please contact Miele.

The contact details for Miele are given at the back of these instructions.

When contacting Miele, please quote the model and serial number of your appliance.

These can be found on the data plate.

### **Position of the data plate**

The data plate is visible after removing the grease filters.

### **Warranty**

The manufacturer's warranty for this appliance is 2 years.

For further information, please refer to your warranty booklet.

## Technical data

Fan motor*	200 W
Cooktop lighting	3 x 3 W
Glass edge feature lighting	10 W
Total rated load*	219 W
Voltage, frequency	AC 230 V, 50 Hz
Fuse rating	10 A
Mains connection cable length	1.5 m
Weight	
DA 6296 W	27 kg
DA 6296 W EXT	24 kg
Extraction power* according to EN 61591, extraction ducting Ø 125/150 mm	
Setting 1	180/200 m³/h
Setting 2	280/300 m³/h
Setting 3	380/400 m³/h
Intensive setting	580/640 m³/h
Recirculation power**	
Setting 1	150 m³/h
Setting 2	210 m³/h
Setting 3	330 m³/h
Intensive setting	490 m³/h

\* For EXT models, the rated load and extraction power will depend on the type of external motor fitted.

Length of connection cable to external motor: 1.9 m

\*\*Recirculation mode with conversion kit DUW 20 and charcoal filter DKF 12 (optional accessories)

### **Conformity declaration**

Miele hereby declares that the rangehoods listed at the end of this booklet comply with the basic requirements and other relevant regulations of Guideline 1999/5/EC.

A copy of the full Declaration of Conformity can be obtained from the address on the back page.



**Miele Australia Pty. Ltd.**

ABN 96 005 635 398

**Miele Center and Head Office Melbourne:**

1 Gilbert Park Drive  
Knoxfield, VIC 3180

**Miele Center and Office Melbourne:**

206-210 Coventry Street  
South Melbourne, VIC 3205

**Miele Center and Office Sydney:**

3 Skyline Place  
Frenchs Forest, NSW 2086

**Miele Center and Office Brisbane:**

39 Harvey Street North  
Eagle Farm, QLD 4009

**Miele Center and Office Adelaide:**

83-85 Sir Donald Bradman Drive  
Hilton, SA 5033

**Miele Center and Office Perth:**

205-207 Stirling Highway  
Claremont, WA 6010



**[www.miele.com.au](http://www.miele.com.au)**



# Miele

**Miele New Zealand Limited**

**Head Office:**

Unit L, 10-20 Sylvia Park Road  
Mt Wellington, Auckland 1060

**Miele Center Auckland:**

8 College Hill  
Freemans Bay, Auckland 1011

**Telephone:**

0800 4 MIELE (0800 464 353)

[www.miele.co.nz](http://www.miele.co.nz)

**Miele Global Headquarters**

**Germany**

**Miele & Cie. KG**

Carl-Miele-Straße 29  
33332 Gütersloh  
Federal Republic of Germany

DA 6296 W  
DA 6296 W EXT



en-AU, NZ

M.-Nr. 09 705 630 / 00